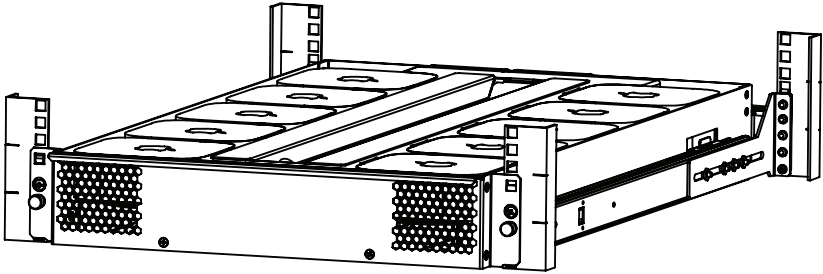# 2U HyperShelf for 10 Apple Mac Mini (M4, 2024)

Installation Instructions

Kit P/N: 115-9156

Kit Contents

Kit Contents:
- (1) Hypershelf
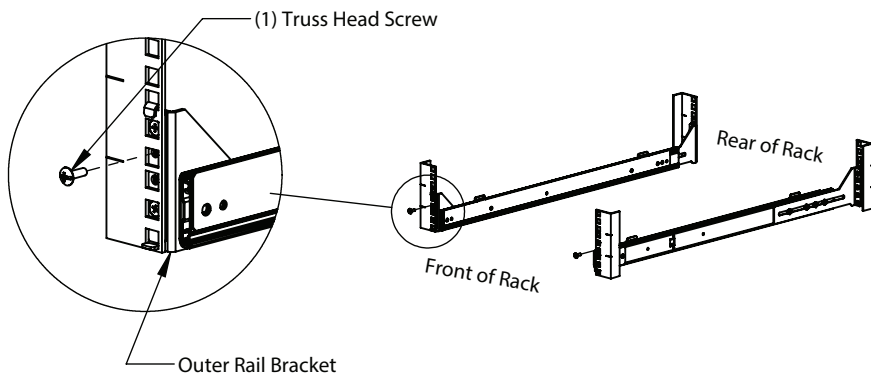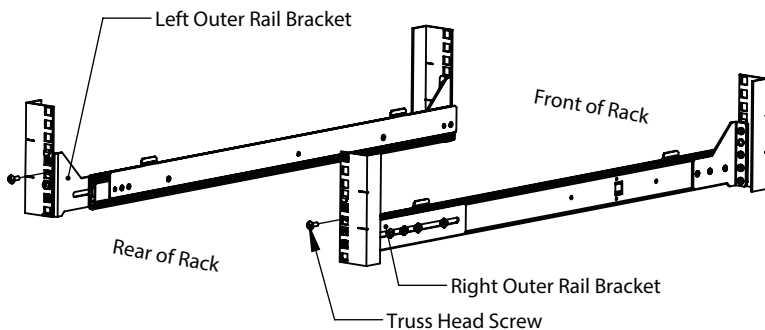- (1) Cable Management Arm Kit
- (1) Rail Kit

Cable Management Arm Kit:
- (1) Cable Management Arm Assembly
- (1) 50" Velcro Wrap
- (10) 11" Cable Tie
- (8) 8-32 x .500 Truss Head Screw

Rail Kit:
- (1) Rail Assembly Pair
- (4) 8-32 x .250 Truss Head Screw

Installation Instructions

Step 1a <u>Attach Rail Assemblies:</u> Attatch the rail assemblies to the rack by hooking the top of the Outer Rail Bracket into the top of the "U" space. Secure the rails by installing (1) 8-32 x .500 Truss Head Screw per side into the Outer Rail Bracket.
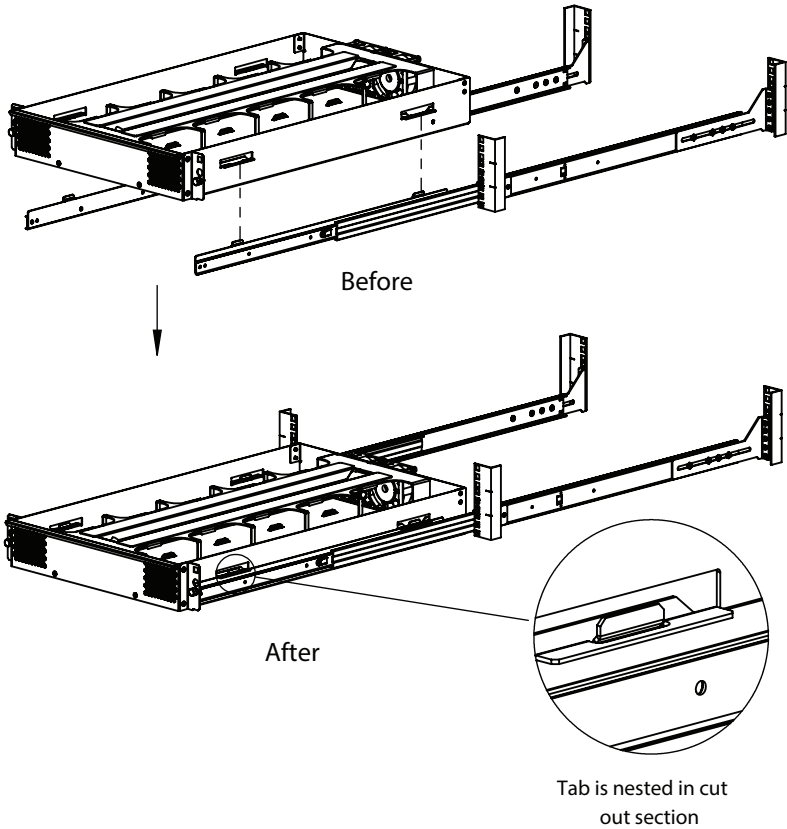
(1) Truss Head Screw

Rear of Rack

Front of Rack

Outer Rail Bracket

Step 1b <u>Secure Rail Assemblies:</u> Secure the rear of the rail assemblies by installing (1) 8-32 x .500 Truss Head Screw into the right and left Outer Rail Bracket.
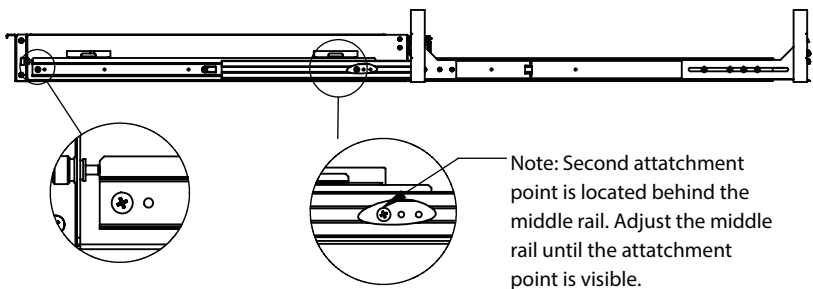
Left Outer Rail Bracket

Front of Rack

Rear of Rack

Right Outer Rail Bracket

Truss Head Screw

RackSolutions.com *If we can't mount it , no one can.*

Step 2   Install the HyperShelf: With the rails fully extended, align the shelf with the rail side tabs and place the shelf on the rails. (Fan Upgrade Kit Shown)
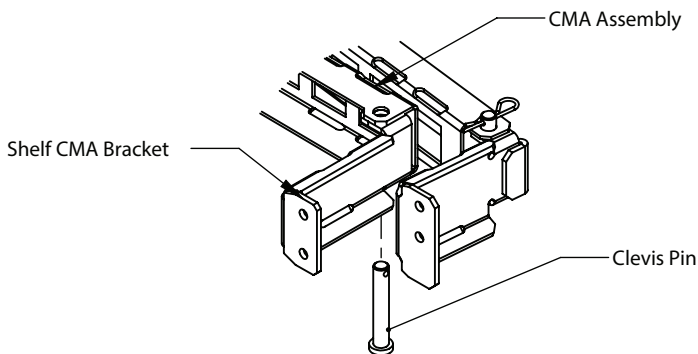
Before

After

Tab is nested in cut out section

Step 2b   Secure the HyperShelf: Secure the HyperShelf by installing (2) 8-32 x .250 Truss Head Screw provided in the Rail Kit into the inner rail attatchment points on each side of the shelf.

Note: Second attatchment point is located behind the middle rail. Adjust the middle rail until the attatchment point is visible.

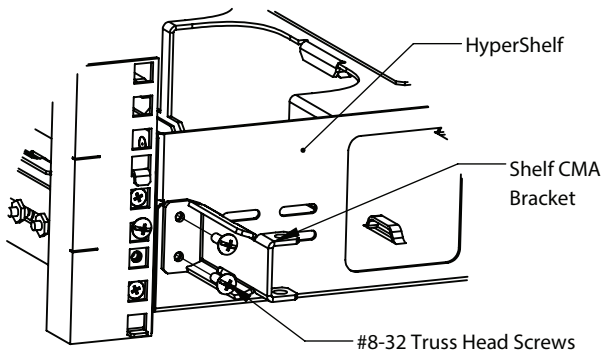RackSolutions.com   If we can't mount it , no one can.

Cable Management Arm Installation Instructions

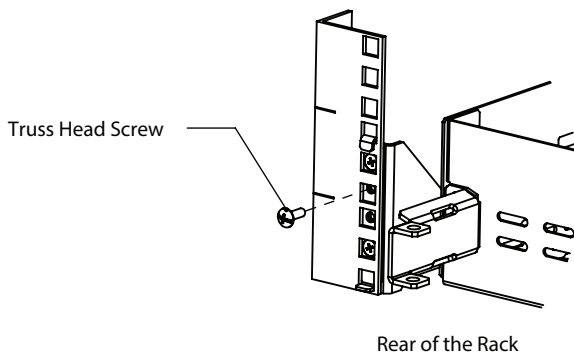Step 3a   Remove Clevis Pin : Remove the Clevis Pin that fastenes the Shelf CMA Bracket
to the CMA Assembly.

CMA Assembly
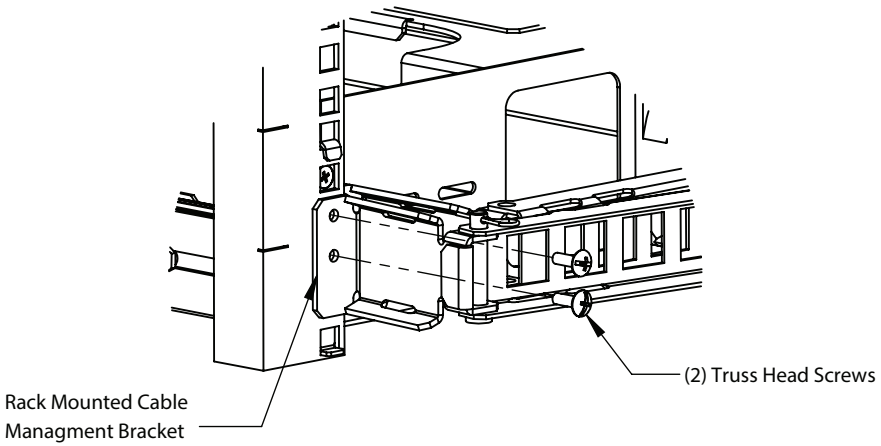
Shelf CMA Bracket

Clevis Pin

Step 3b   Mount Shelf CMA Bracket : Secure the Shelf CMA Bracket to the rear (left side) of the
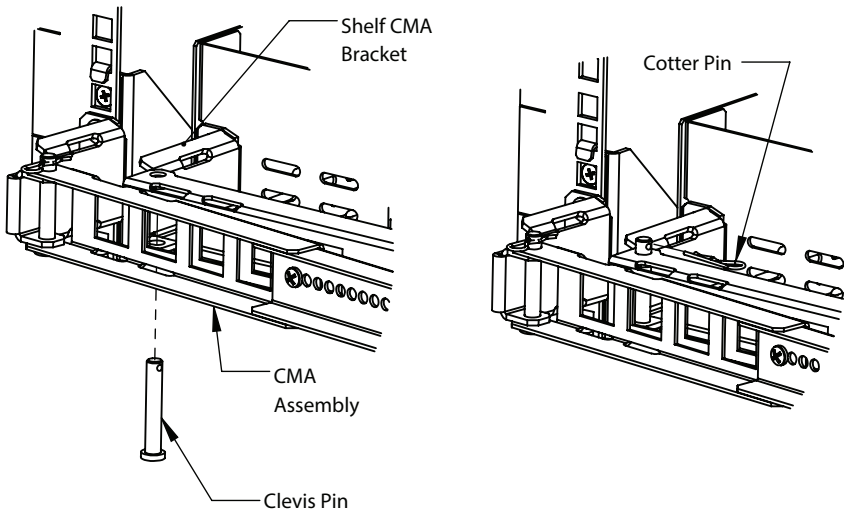HyperShelf using the provided (2) #8-32 Truss Head Screws

HyperShelf

Shelf CMA
Bracket

#8-32 Truss Head Screws

Step 4   Remove Screw: Remove the (1) Truss Head Screw that is located at the left rear of
the rack.

Truss Head Screw

Rear of the Rack

Step 5   Secure the Cable Managment Arm: Secure the Cable Managment Arm to the rack by
            installing (1) 8-32 x .500 Truss Head Screw provided in the Cable Managment Arm
            Kit and the screw from the previous step through the Rack Mounted Cable
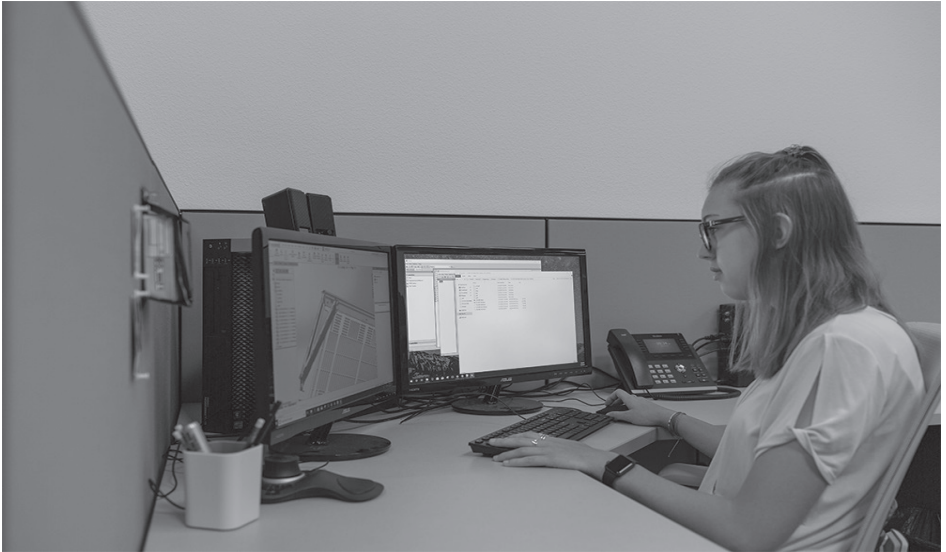   Managment Bracket.

(2) Truss Head Screws

Rack Mounted Cable
Managment Bracket

Step 6   Fasten Shelf CMA Bracket: Re-attach the Clevis Pin that fastenes the Shelf CMA Bracket
            to the CMA Assembly using the paired Cotter Pin.

Shelf CMA
Bracket

Cotter Pin

CMA
Assembly

Clevis Pin

Custom Engineering

Our top notch (in-house) mechanical and electrical engineers are available to solve your toughest custom design challenges.

On-Site Manufacturing

Our manufacturing facility is on-site at our Texas headquarters. If we send them a drawing in the morning, we can have parts ready to ship-out that evening.
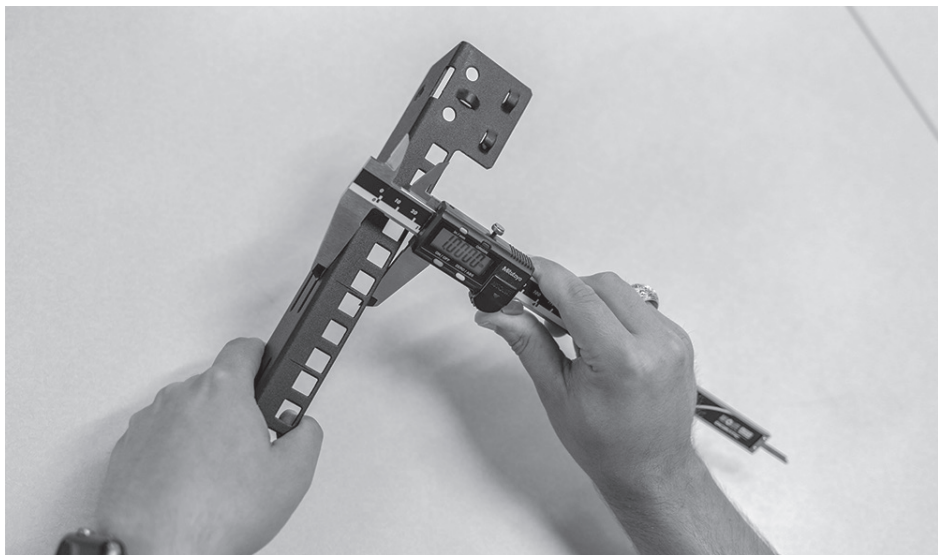
Online, in stock, and always growing

Our distribution centers are packed. Check our website to see if your solution is ready and waiting. Our availability is shown in real time.

In-House Advantage

Customer support, engineering, and logistics are standing by to get you whatever answers you need. Even if that means walking down and asking the guy who made it for you.

We'll **help you** figure out what **you need,** get it to **you fast,** and we'll **stand behind it**

Warranty Statement
Innovation First, Inc. warrants our products against defects in material and workmanship for a period of one (1) year from the date of purchase. Innovation First, Inc. liability shall be limited to repairing or replacing, at our option, any defective product.

9156