










Patent(s) Pending

# Dell FX160 and Monitor Wall Mount

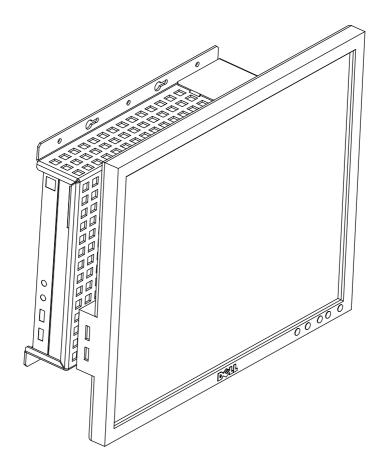

Installation Instructions
Kit P/N: RETAIL-DELL-WALL-007

## **Kit Contents**

#### **Assembly Components:**

- (1) Main Bracket
- (1) Cover
- (1) Pivot Assembly

### Wall Mount Hardware Package:

- (4) Pan Head Screw
- (4) Anchors

#### **Monitor Hardware Package:**


- (8) Nylon Spacers
- (5) M4 x 10mm Pan Head Screws
- (5) M4 x 18mm Pan Head Screws
- (5) M4 x 25mm Pan Head Screws
- (5) 8-32 Flat Head Screws

## **PC Wall Mount Installation Instructions**


**Step 1.** <u>Determine Location:</u> Select appropriate location on the wall. Consider cable routing and length.

Step 2. Mark Hole Positions: Hold the base in position and mark 4 hole positions with a

pencil.



Step 3a. Install Drywall Anchor: Install one drywall anchor at each hole mark. Using a #2 Phillips head screwdriver press the anchor into the drywall while turning clockwise until it is seated flush with the wall.



Step 3b. Install 4 Screws: Leave 1/4" of each screw protruding out of the wall.



Page 2

## **Installation Instructions**

- **Step 4.** <u>VESA Monitor Bracket Attachment:</u> Turn the monitor face down on a large flat surface. Locate the four VESA mounting holes on the rear of the monitor.
  - a. <u>Determine if spacers are required</u>: Some monitors have a "recess" on the rear surface. Spacers are provided to fill this gap. See Table A for spacer length options.
  - b. <u>Determine Screw Length</u>: Only use the metric M4 screws provided. Screw length is determined by the spacers used (see Table A).





Table A

| Recess Depth | Spacer           | Screw |
|--------------|------------------|-------|
| 0            | No Spacer Needed | 10mm  |
| .250 (1/4)   |                  | 18mm  |
| .500 (1/2)   |                  | 25mm  |

Screws and Spacers are Shown to Scale

**Step 5.** Monitor Bracket Attachment: Remove the main Bracket if it is attached to the wall before continuing with this step. Mount the Monitor Assembly through the Main Bracket using the (4) 8-32 Flat Head screws.



Page 3



## We promise you're going to have a great experience.











## **Installation Instructions**

Step 6. Computer and Cover Attachment: Slide the computer into the Main Bracket.

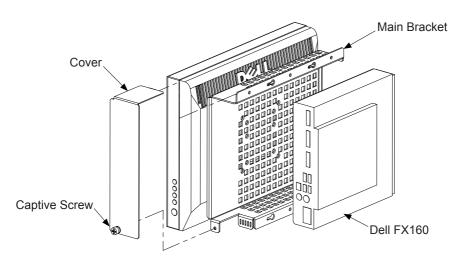

**Step 7**. <u>Attach Mount Base:</u> Attach the base to the wall using the 4 screws that were installed in 3b. Tighten Securely.



Warranty Statement

Innovation First, Inc. warrants our products against defects in material and workmanship for a period of one (1) year from the date of purchase. Innovation First, Inc. liability shall be limited to repairing or replacing, at our option, any defective product.